



# Century™ Series

SC 600 Series

## Quality speaks louder than words


Today's contact center and office professionals expect a lot from their headsets: They require outstanding sound performance for natural, conversational communication, extreme durability to withstand the toughest business environments and exceptional comfort for long hours of use.

The Century™ Series of wired headsets delivers on all points. In addition, the flexibility to connect to a variety of devices and stay mobile - plus seamless interaction and full call control with all major Unified Communications platforms and phone solutions. The Century™ Series of wired headsets covers every situation with premium quality and style.

### BENEFITS & FEATURES

- **Natural listening experience**  
With Sennheiser Voice Clarity
- **Perfect speech output**  
Ultra noise-cancelling microphone
- **Outstanding sound quality**  
High-quality neodymium speaker
- **High-quality durable design**  
Brushed aluminum and stainless steel components
- **Extreme durability**  
Unibody headband construction for maximum strength at stress points
- **Exceptional wearing comfort**  
Large leatherette ear pads for all day comfort and powerful sound
- **Personal fit**  
Extension headband with number indications for accurate adjustment
- **Easy to store and bring along**  
With fold-flat ear cups and carry pouch

See more at [www.sennheiser.com/century](http://www.sennheiser.com/century)

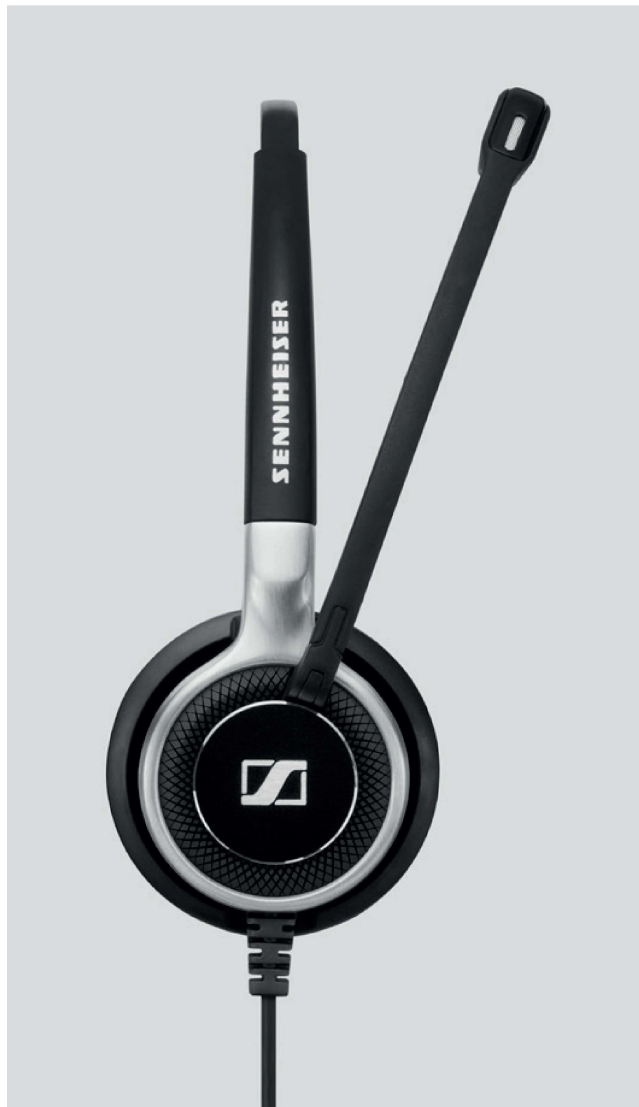

The Century™ Series offers, with its 15 variants, connectivity to a variety of devices. See all headset variants and connectivity options in the table overview on page 3





# Century™ Series

SC 600 Series

## Product Data

### General Data

Wearing Style	Headband – single and double sided variants. See table overview.
Color	Black with silver
Headset weight	Single sided 59 g / 2.1 oz Double-sided 95 g / 3.4 oz

### Audio

Sennheiser Voice Clarity	For a clear and natural listening experience
Microphone	Ultra noise-cancelling microphone for optimal speech transmission
Microphone frequency range	150 – 6,800 Hz (Wideband)
Speaker type	High-quality neodymium magnet speaker for outstanding audio quality
Speaker frequency response – multimedia	50 - 18,000 Hz 50 - 12,000 Hz (SC 638 / SC 668)
Sound pressure	Limited by ActiveGard®: Max. 103 dB via ED Max. 110 dB via ED (SC 638 / SC 668) Max. 113 dB via USB Max. 118 dB via 3.5 mm jack
Made for communication & multimedia	Sound enhancement profiles adjust automatically for optimal communication or multimedia use*

### Hearing Protection

ActiveGard® Technology	Protects users against acoustic injury caused by sudden sound burst on the line
EU Noise at Work limiter*/**	Enhanced audio protection preventing listening fatigue, average 85 dB over a work day

\*Available when the headset is connected via USB

\*\*In compliance with EU Noise at Work legislation (Directive 2003/10/EC)

\*\*\*Available on variants: SC 635 USB &amp; SC 665

### Easy Call Management

In-line call control (USB)	Answer/end call, volume up/down and mute
In-line mini call control (3.5 mm jack)***	Answer/end call

### Long-Term Reliability

Vectran™ reinforced cable	For extreme durability
Unibody headband construction	For maximum strength
Warranty	3 years

### Content of delivery

What's in the box	Headset, quick guide, safety guide, leatherette ear pad/s, carry pouch, magnetic holder, cable clip mounted on headset,
-------------------	---

### Cloud Based Asset Management

HeadSetup™ Pro Manager	Manage, update and configure your Sennheiser audio devices from one location:
------------------------	---

[www.sennheiser.com/headsetup-pro-manager](http://www.sennheiser.com/headsetup-pro-manager)

For information about accessories and spare parts go to:






[www.sennheiser.com/century](http://www.sennheiser.com/century)



# Century™ Series Overview

SC 600 Series



Connects to	Product name /Art.no	Description	Details	EAN no. / UPC no.
	<b>SC 630</b> Art. no 504556	Single-sided, ED	Optimized for use with desk phones	EAN: 40 44155 08347 7 UPC: 6 15104 23704 9
	<b>SC 660</b> Art. no 504557	Double-sided, ED	Easy Disconnect plug with quick release mechanism	EAN: 40 44155 08348 4 UPC: 6 15104 23708 7
	<b>SC 632</b> Art. no 504558	Single-sided, ED, low impedance	Optimized for low impedance devices	EAN: 40 44155 08349 1 UPC: 6 15104 23712 4
	<b>SC 662</b> Art. no 504559	Double-sided, ED, low impedance		EAN: 40 44155 08350 7 UPC: 6 15104 23714 8
	<b>SC 638</b> Art. no 506494	Single-sided, ED, narrowband	Optimized for narrowband desk phones	EAN: 40 44155 20496 4 UPC: 6 15104 26739 8
	<b>SC 668</b> Art. no 506495	Double-side, ED, narrowband		EAN: 40 44155 20497 1 UPC: 6 15104 26744 2
	<b>SC 660 TC</b> Art. no 507099	Double-sided, ED, hearing aid	Optimized for all standard telecoil hearing aids	EAN: 40 44155 21456 7 UPC: 6 15104 28066 3
	<b>SC 630 USB CTRL</b> Art. no 504554	Single-sided, USB, UC optimized	Optimized for UC	EAN: 40 44155 08345 3 UPC: 6 15104 23698 1
	<b>SC 660 USB CTRL</b> Art. no 504555	Double-sided, USB, UC optimized	In-line call control for easy call management	EAN: 40 44155 08346 0 UPC: 6 15104 23700 1
	<b>SC 630 USB ML</b> Art. no 504552	Single-sided, USB, Skype for Business Certified	Certified for Skype for Business	EAN: 40 44155 08343 9 UPC: 6 15104 23696 7
	<b>SC 660 USB ML</b> Art. no 504553	Double-sided, USB, Skype for Business Certified	In-line call control for easy call management	EAN: 40 44155 08344 6 UPC: 6 15104 23697 4
	<b>SC 635 USB</b> Art. no 507254	Single-sided, USB/3.5 mm jack	Optimized for UC & Certified for Skype for Business	EAN: 40 44155 22408 5 UPC: 6 15104 30132 0
	<b>SC 665 USB</b> Art. no 507257	Double-sided, USB/3.5 mm jack	Offering added mobility and flexibility	EAN: 40 44155 22411 5 UPC: 6 15104 30135 1
	<b>SC 635</b> Art. no 507253	Single-sided, 3.5 mm jack	For phones/tablets with 3.5 mm connector*	EAN: 40 44155 22407 8 UPC: 6 15104 30131 3
	<b>SC 665</b> Art. no 507256	Double-sided, 3.5 mm jack	USB controller cable available as accessory	EAN: 40 44155 22410 8 UPC: 6 15104 30134 4

\*Compatible with other connection types when adaptor is used.